# QUALIKO

PROFESSIONAL LIGHT COMPONENTS

# 2022

# SHARD

QUALIKO srl
PROFESSIONAL LIGHT COMPONENTS

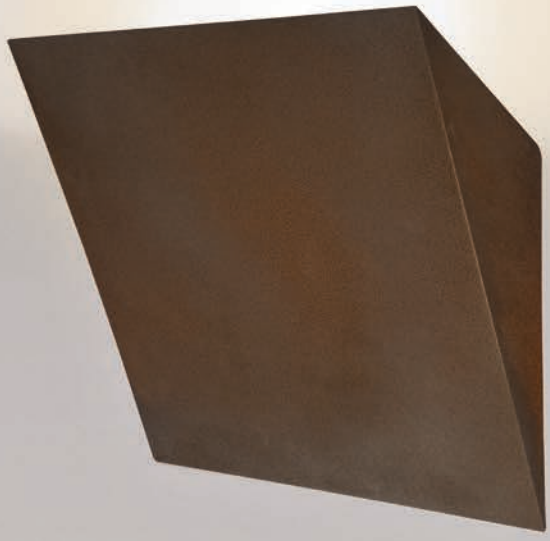

Lampade LED Gypsolyte • LED Gypsolyte lamps

# SHARD Lampade LED Gypsolyte • LED Gypsolyte lamps

Made in Italy

INDOOR IP20

CE IP 20 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| SHARD | **BW8432GLEDNW** | 100÷250 AC | 21±1 | 2850 | NW | 4000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |
| SHARD | **BW8432GLEDWW** | 100÷250 AC | 21±1 | 2600 | WW | 3000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |
| SHARD GOLD | **BW8432GOLDNW** | 100÷250 AC | 21±1 | 2850 | NW | 4000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |
| SHARD GOLD | **BW8432GOLDWW** | 100÷250 AC | 21±1 | 2600 | WW | 3000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |
| SHARD CORTEN | **BW8432RUSTNW** | 100÷250 AC | 21±1 | 2850 | NW | 4000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |
| SHARD CORTEN | **BW8432RUSTWW** | 100÷250 AC | 21±1 | 2600 | WW | 3000°K | >80 | 250x125x59h | 330x310x135h | 2,20 |

**Applique LED**
- Struttura in Gypsolyte
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata

**LED wall lamp**
- Structure in Gypsolyte
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Gypsolyte
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Gypsolyte
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Gypsolyte
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado- Larga vida