# QUALIKO

PROFESSIONAL LIGHT COMPONENTS

# 2022

# FOLD

QUALIKO srl
PROFESSIONAL LIGHT COMPONENTS

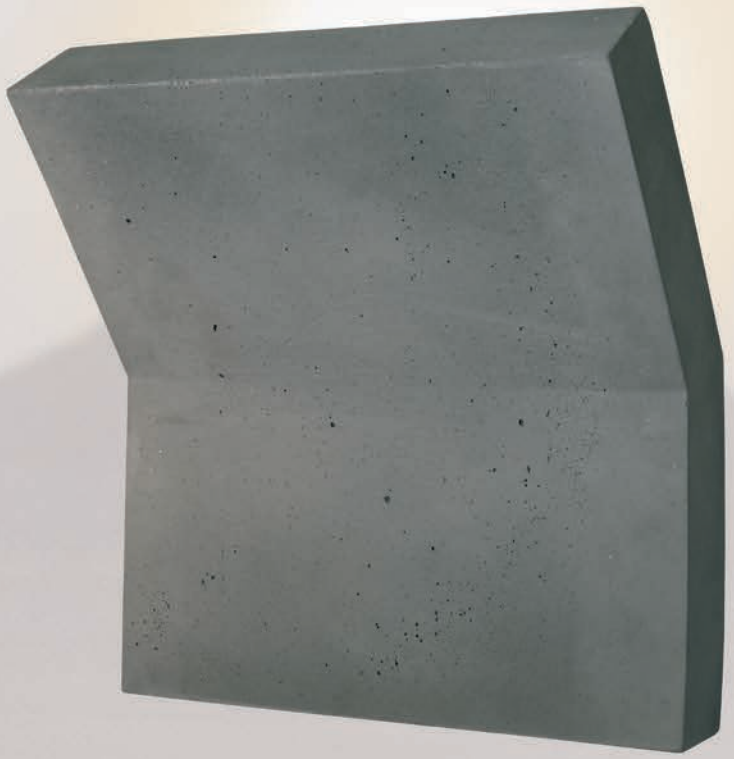

Lampade LED Cemento • LED Concrete lamps

# FOLD Lampade LED Cemento • LED Concrete lamps

Made in Italy

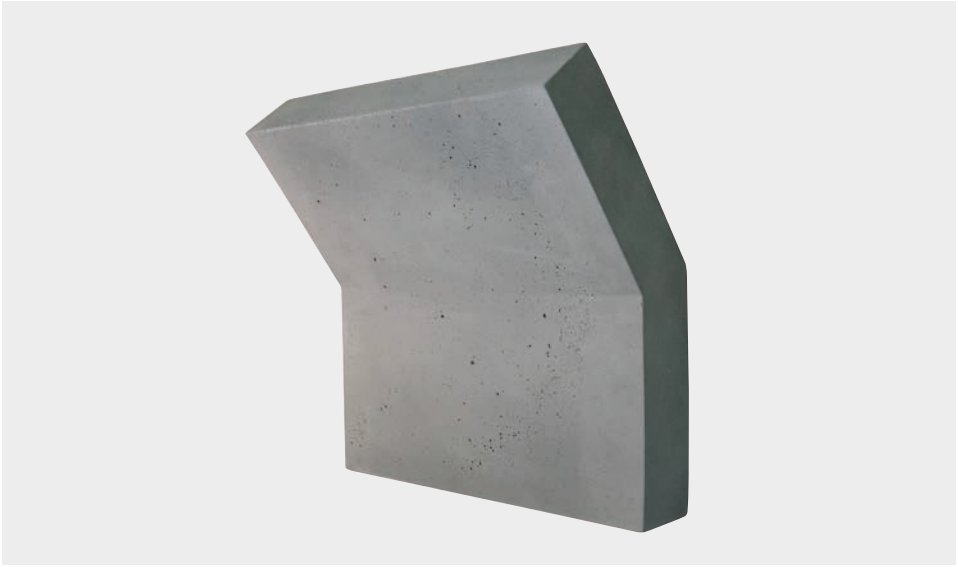

INDOOR IP54 OUTDOOR

CE IP54 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| FOLD LARGE | **BWC8422LEDNW** | 100÷250 AC | 31±1 | 3800 | NW | 4000°K | >80 | 135x300x300h | 380x370x160h | 3,00 |
| FOLD LARGE | **BWC8422LEDWW** | 100÷250 AC | 31±1 | 3650 | WW | 3000°K | >80 | 135x300x300h | 380x370x160h | 3,00 |

**Applique LED**
- Struttura in Cemento
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata

**LED wall lamp**
- Structure in Concrete
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Beton
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Ciment
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Cemento
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado- Larga vida



# FRAME

QUALIKO srl
PROFESSIONAL LIGHT COMPONENTS

Lampade LED Cemento • LED Concrete lamps

# FRAME Lampade LED Cemento • LED Concrete lamps

Made in Italy

INDOOR IP54 OUTDOOR

CE IP54 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| FRAME SQ | **BWC8438LEDNW** | 100÷250 AC | 8±1 | 930 | NW | 4000°K | >80 | 222x150x50h | 265x210x110h | 1,30 |
| FRAME SQ | **BWC8438LEDWW** | 100÷250 AC | 8±1 | 890 | WW | 3000°K | >80 | 222x150x50h | 265x210x110h | 1,30 |

**Applique LED**
- Struttura in Cemento
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata






**LED wall lamp**
- Structure in Concrete
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Beton
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Ciment
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Cemento
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado
- Larga vida

# BRICK

QUALIKO srl
PROFESSIONAL LIGHT COMPONENTS

Lampade LED Cemento • LED Concrete lamps

# BRICK Lampade LED Cemento • LED Concrete lamps

Made in Italy

IP54 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| BRICK | **BWC8211LEDNW** | 100÷250 AC | 12±1 | 1310 | NW | 4000°K | >80 | 275x94x57h | 340x150x120h | 1,30 |
| BRICK | **BWC8211LEDWW** | 100÷250 AC | 12±1 | 1250 | WW | 3000°K | >80 | 275x94x57h | 340x150x120h | 1,30 |

**Applique LED**
- Struttura in Cemento
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata

**LED wall lamp**
- Structure in Concrete
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Beton
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Ciment
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Cemento
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado- Larga vida

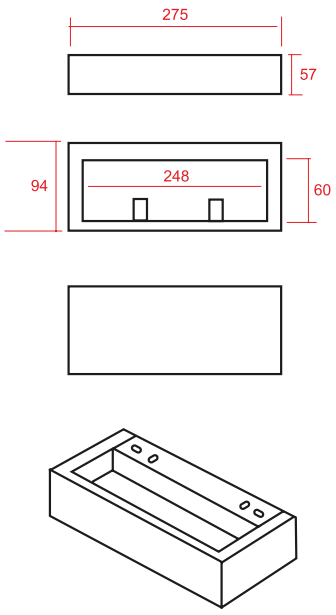

Lampade LED Cemento • LED Concrete lamps

# LOGOS Lampade LED Cemento • LED Concrete lamps

Made in Italy

IP54 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| LOGOS | **BWC8339LEDNW** | 100÷250 AC | 8±1 | 940 | NW | 4000°K | >80 | 125x125x59h | 170x170x110h | 1,00 |
| LOGOS | **BWC8339LEDWW** | 100÷250 AC | 8±1 | 890 | WW | 3000°K | >80 | 125x125x59h | 170x170x110h | 1,00 |

**Applique LED**
- Struttura in Cemento
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata

**LED wall lamp**
- Structure in Concrete
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Beton
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Ciment
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Cemento
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado- Larga vida

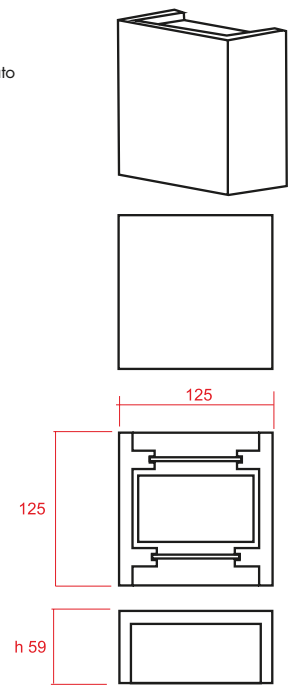

# BOB

QUALIKO srl
PROFESSIONAL LIGHT COMPONENTS

Lampade LED Cemento • LED Concrete lamps

# BOB Lampade LED Cemento • LED Concrete lamps

Made in Italy

CE IP54 EMC RoHS

| Type | Part N° | Input (V) | Power (W) | Lumen | Light Colour | °Kelvin (±10%) | CRI | Dimensions (mm) | Packing box dimensions (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| BOB | **BWC8417LEDWW** | 100÷250 AC | 7±1 | 350 | WW | 3000°K | >80 | 150x125x100h | 210x200x180h | 1,47 |

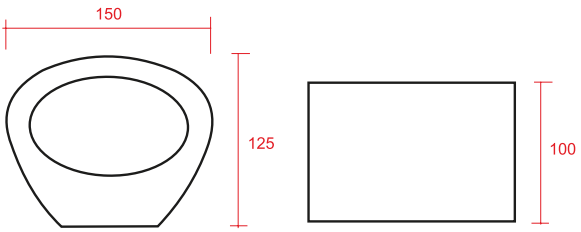


**Applique LED**
- Struttura in Cemento
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore incorporato
- Consumo molto limitato
- Lunga durata

**LED wall lamp**
- Structure in Concrete
- Homogeneous light output
- Safety low voltage with specific included driver
- Limited consumption
- Long life time

**LED Wandleuchte**
- Struktur in Beton
- Homogenes Licht
- NV-Betrieb durch besonderen Transformator
- Begrenzter Verbrauch
- Lange Lebensdauer

**Applique LED**
- Corps en Ciment
- Luminosité très homogène
- Il marche en basse tension avec alimentation integrée
- Consommation tres limitée
- Longue durée de vie

**Lamparas de pared LED**
- Estructura de Cemento
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con transformador integrado
- Consumo muy limitado- Larga vida